


Narrow Key Switches

S-NAR-KEY1MAIN-US32D

S-NAR-KEY1MOM-US32D

Phone: 877.421.9490
Fax: 877.421.3158
customerservice@wikk.com

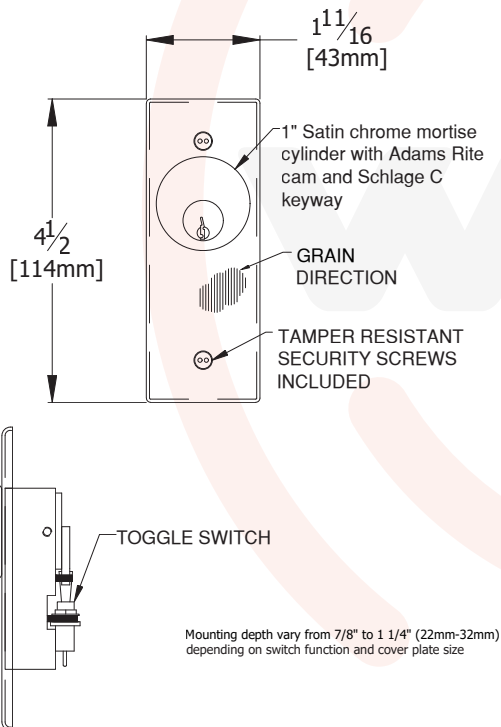

Technical Specs:

Heavy duty compact block and switch assembly; 1" satin chrome mortise cylinder with Adams Rite cam and Schlage C key-ways; Rated 6 amps at 125 VAC, 3 amps at 250 VAC (1PDT Momentary Rated 5 amps at 120VAC, 2 amps at 250 VAC)

Specification Summary

The switches to be used throughout the complex shall be Wikk® Industries Inc. Key Switches, and shall be ADA complaint. Faceplates shall be constructed 18GA 304 Stainless Steel. Switches shall be rated 6 amps at 125 VAC, 3 amps at 250 VAC (1PDT Momentary Rated 5 amps at 120VAC, 2 amps at 250 VAC)

Features:

- Momentary or Maintained contact options
- 304 Satin Stainless Steel US32D (630)
- 1 Pole
- Key can be removed while in any operating mode
- 1" mortise cylinder with standard Adam Rite cam
- Schlage C Keyways
- All locks keyed alike

Mounting Options:

Surface Mount:

Surface Box: M-NAR-SURF

For custom quote request, contact customerservice@wikk.com