


6" Curved Switch Series

6C Series

Phone: 877.421.9490
Fax: 877.421.3158
customerservice@wikk.com

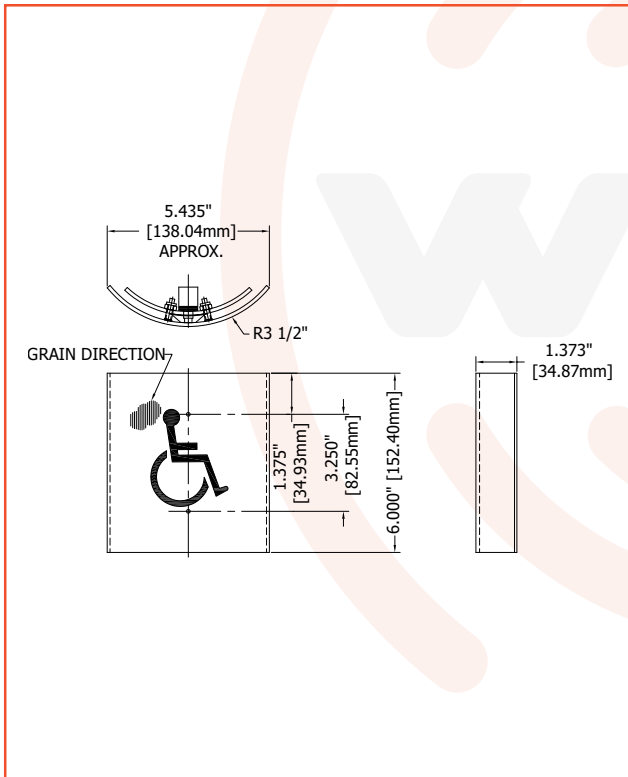

Specification Summary

The switches to be used throughout the complex shall be Wikk® Industries Inc. 6C (6" Curved) switches, and shall be ADA compliant. Switches shall be such that pressing any part of the faceplate will activate the device. Switches shall use a conical spring to provide consistent activation. Switches shall be rated at 15A, 125/250VAC; 3/4hp, 125VAC.

Features:

- The 6C Series has high quality image and text
- 316 Alloy Satin Stainless Steel US32D (630)
- Tamper resistant by reason of no visible mounting
- Ready for either hardwired or wireless products

Mounting Options:

Flush Mount:

Single Gang Box

Bollard:

6" Round Bollard

All WIKK switches are customizable. Contact us to learn more. This product has these customizable options:

Materials/Finishes:

Mirror Stainless (629), US4 (606 uncoated), US10B (613), US3 (605 uncoated)

Logo:

Debossed or Engraved: with infill colors shown in literature, or custom Engraved and infilled with your choice of colors - Blue, Black, White, Red, Green, and Chocolate Brown

Overall Dimensions: 5.43" W x 6" H x .5" Deep
(138mm x 152mm x 13mm)

Voltage 12/24V AC/DC
Switch Type Momentary
Contact Type Single Pole-Double Throw, dry contact momentary action micro-switch, capable of normally open or normally closed operation.
Current Rating 15Amp, 125/250 VAC UL & CSA Tested
Max Temp Rating -40°F to +221°F (-40°C to +105°C)
UL & CSA Tested

For technical assistance, contact engineering@wikk.com