


INGRESS'R® I36-3

I36-3 (CLEAR)

Clear Anodized Aluminum (628)

Phone: 877.421.9490
Fax: 877.421.3158
customerservice@wikk.com

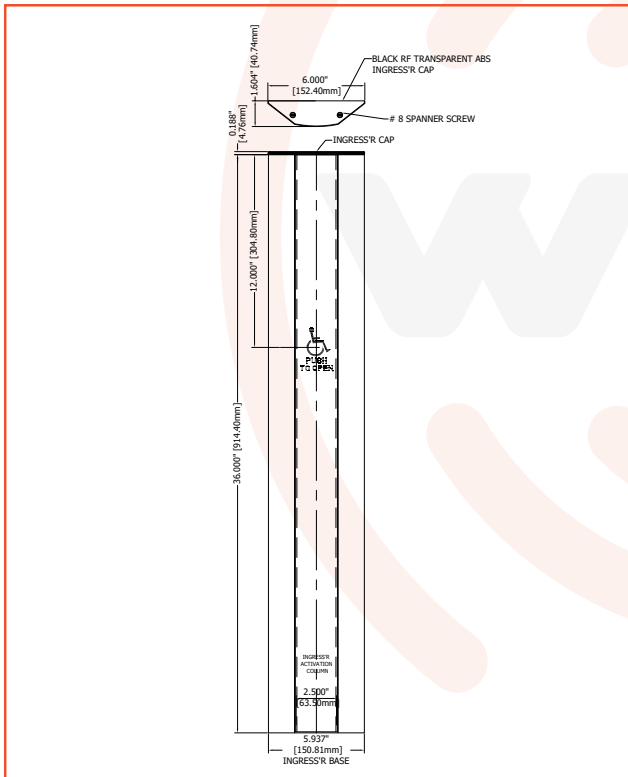

Specification Summary

The switches to be used throughout the complex shall be Wikk® Industries, Inc. INGRESS'R™ activation door control. The INGRESS'R™ activation door control shall be ADA compliant and exceed California Building Code, Section 11B404.3. INGRESS'R™ shall be such that pressing any part of the actuating column will activate the device. Switches shall be rated at 15A, 125/250VAC; 3/4hp, 125VAC.

Features:

- Clear Anodized (628) Aluminum Type 6063 T-5
- The contoured profile of The INGRESS'R® allows activation from literally any approach and height level
- Logo is Silk Screened Blue
- The INGRESS'R® is ready for hardwired or wireless products
- Naturally directs movement toward central activation column
- Deflects impact from wheeled carts and conveyances

Mounting Options:

Bollard Mount:

- Part# BPS SM INGR: Clear (628), DK Brz (710), LT Brz, Black (711), US32 (629), US32D (630)
- Part# BPS SM INGR48: Clear (628), DK Brz (710), LT Brz, Black (711), US32 (629), US32D (630)
- Part# 1x6 INGR: Clear (628), DK Brz (710)

Wall Mount:

Mounts on most wall surfaces, including uneven surfaces

Customizable Options:

Materials/Finishes:

Dark Bronze Anodized Aluminum (710), Satin Stainless Steel - US32D (630), Mirror Stainless Steel - US32 (629), Mirror Brass (Uncoated) - US3 (605), Satin Brass (Uncoated) - US4 (606), Oil Rubbed & Relieved Oxidized Brass - US10B (613), Powder Coated - See color Chart

Logo:

Logo Silk Screened with colors shown in literature, or custom Logo with your choice of colors: Blue, Black, White, Red, Green, and Chocolate Brown

Custom Lengths:

9" (229 mm), 18" (457 mm), 24" (610 mm), 42" (1067 mm)

Lights:

Amber, Blue, Red, White, or Yellow - Note: light only illuminates when activated

Narrow Style Available (4.25" wide) (-NAR)

Double Pole Double Throw (2P)

Bottom ABS Cap (CC)

Overall Dimensions: 6" Wide x 36" Tall x 1½" Deep
(125mm x 914mm x 38mm)

Voltage	12/24V AC/DC
Switch Type	Momentary
Contact Type	Single Pole-Double Throw, dry contact momentary action micro-switch, capable of normally open or normally closed operation.
Current Rating	15Amp, 125/250 VAC
Max Temp Rating	-40°F to +221°F (-40°C to +105°C)
	UL & CSA Tested

For technical assistance, contact engineering@wikk.com