
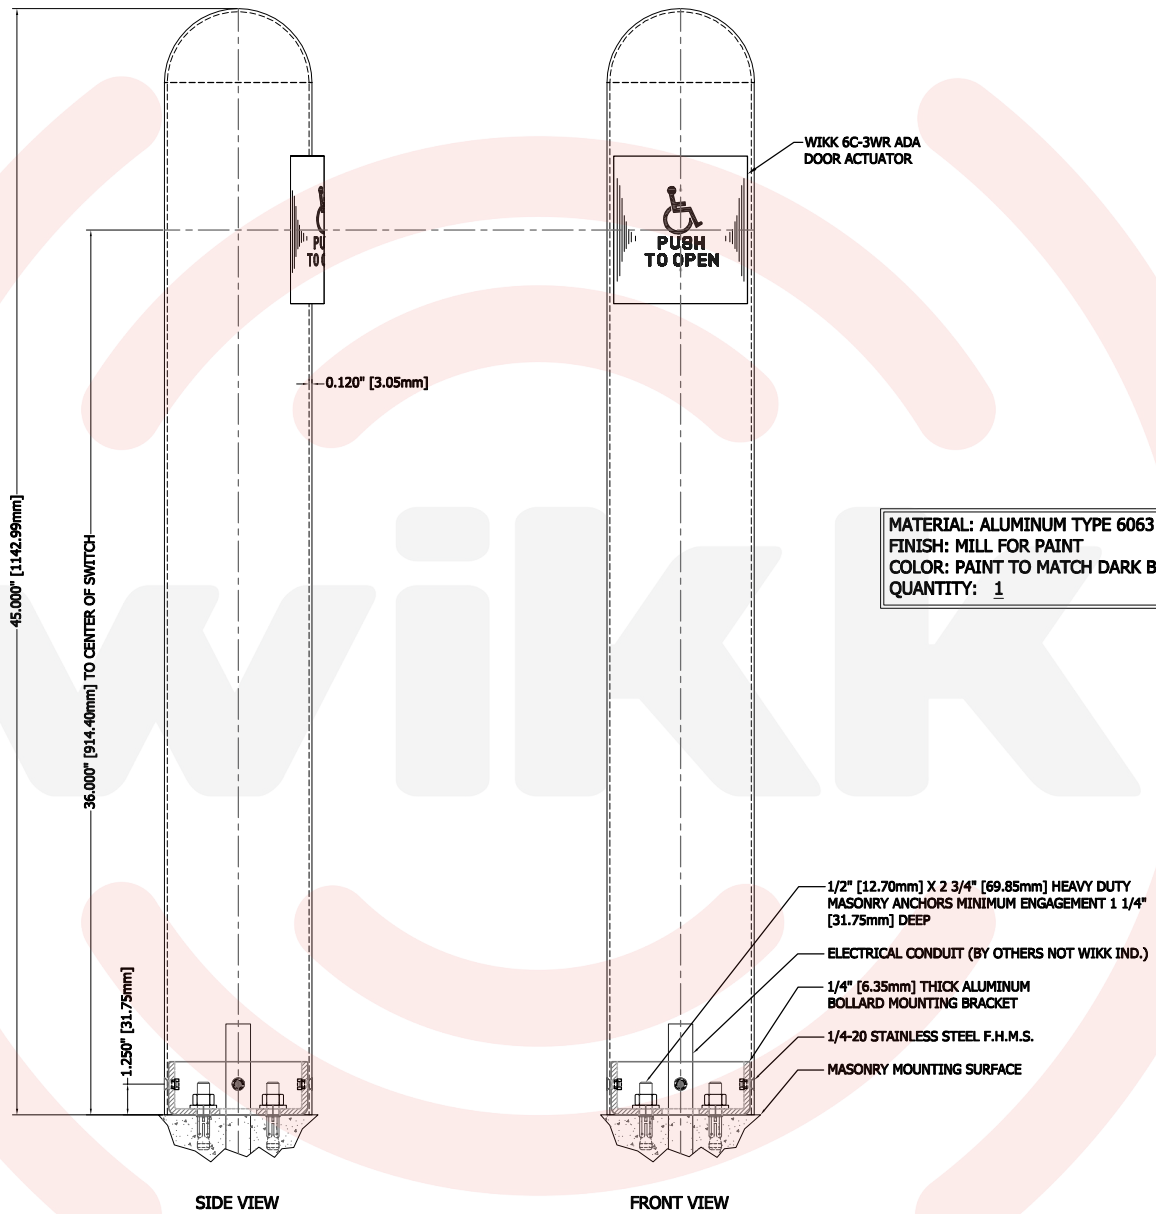


CUSTOMER APPROVAL

INITIAL: \_\_\_\_\_

DATE: \_\_\_\_\_

THE WARRANTY IS VOIDED  
IF ANY ALTERATIONS OR  
MODIFICATIONS ARE MADE  
TO THE BOLLARD.




MATERIAL: ALUMINUM TYPE 6063 T-5  
FINISH: MILL FOR PAINT  
COLOR: PAINT TO MATCH DARK BRONZE  
QUANTITY: 1

- 1/2" [12.70mm] X 2 3/4" [69.85mm] HEAVY DUTY MASONRY ANCHORS MINIMUM ENGAGEMENT 1 1/4" [31.75mm] DEEP
- ELECTRICAL CONDUIT (BY OTHERS NOT WIKK IND.)
- 1/4" [6.35mm] THICK ALUMINUM BOLLARD MOUNTING BRACKET
- 1/4-20 STAINLESS STEEL F.H.M.S.
- MASONRY MOUNTING SURFACE

SIDE VIEW

FRONT VIEW



Exact product dimensions and features may vary slightly from example shown above.

		Wikk Industries, Inc. 6169 Industrial Ct. Greendale, WI 53129-0167 Phone: 877-421-9490 Fax: 877-421-3158		
		SCALE	DRAWN BY/DATE	CHECKED BY/DATE
N.T.S.		JS/27DEC17	LK/29DEC17	
TITLE		BPDSMPREP36 PTDB		
DRAWING NUMBER		BOLLARDS\BOLLARD LITERATURE\NEW BOLLARD LITERATURE BPDSMPREP36 PTDB		
WIKK PART NO.		BPDSMPREP36 PTDB		