
Bollard RD16

B-10.75RD-AT-32D-CS-RD16 Satin Stainless Steel (630)



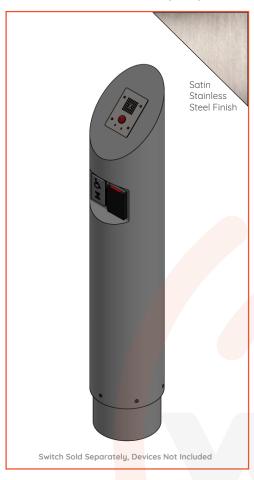

Features & Benefits

Competitive 4-week lead time

Ships from the factory to the job site in 20 business days or less.

Secure mounting

Custom in-ground concealed sleeve base is embedded below floor and secured with 1/2" diameter masonry anchors. Bollard is fastened to the base with stainless hardware above finished ground. Body can be detached from base without disturbing flooring for maintenance or replacement.

Welded angle top

Bollard cap is welded on and ground smooth for a watertight, seamless finish. Angled to prevent rainwater pooling or litter accumulation.

Preps for three devices

Includes cutouts for mounting intercoms, card readers, or actuators. Preps are customizable to fit make/model specified for each device.

Corrosion resistant body

Durable stainless steel construction for long-lasting use in both indoor and outdoor locations.

Specification Summary

Bollard overview:

- 1. Manufacturer: Wikk® Industries Inc.
- 2. Model: B-10.75RD-AT-32D-CS-RD16
- 3. Height: 54" (1372 mm)
- 4. Shape: 10.75" diameter (273 mm)
- 5. Material: Satin Stainless Steel 304, .365" wall (9.3 mm)
- 6. Finish: Satin (US32D) #4 (630)
- 7. Top: Welded Angle
- 8. Mount: In-ground Concealed Sleeve
- 9. Prep for Intercom (on angle top)
- 10. Small Flat Recessed Area
- 11. Prep for Actuator
- 12. Prep for Card Reader
- 13. Country of Origin: Made in the U.S.A.

Optional Finishes:

- Long grain #6
- Mirror US32 (629)
- Non-directional

Countless custom options available!

Contact Wikk for custom short specs or budgetary and design assistance.

To ensure competitive bidding by qualified Sub Contractors, please specify Wikk's products in CSI Divisions: 8, 14, or 28.

