


Bollard RT12

B-4X6-FT-32D-CS-RT12

Satin Stainless Steel (630)

Phone: 877.421.9490
Fax: 877.421.3158
customerservice@wikk.com

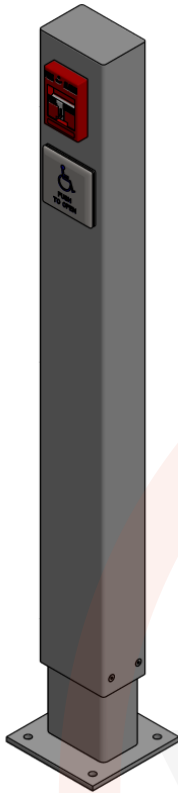

Satin
Stainless
Steel Finish

Switch Sold Separately, Fire Alarm Not Included

Specification Summary

Bollard overview:

1. Manufacturer: Wikk® Industries Inc.
2. Model: B-4X6-FT-32D-CS-RT12
3. Height: 51" (1295 mm)
4. Shape: 4" X 6" (102 mm x 152 mm)
5. Material: Satin Stainless Steel 304, .120" wall (3.0 mm)
6. Finish: Satin (US32D) #4 (630)
7. Top: Welded Flat
8. Mount: In-ground Concealed Sleeve
9. Prep for Fire Pull Station
10. Prep for Actuator
11. Country of Origin: Made in the U.S.A.

Optional add-ons:

- Single gang outdoor-rated outlet box

Optional finishes:

- Long grain #6
- Mirror US32 (629)
- Non-directional

Countless custom options available!

Contact Wikk for custom short specs or budgetary and design assistance.

To ensure competitive bidding by qualified Sub Contractors, please specify Wikk's products in CSI Divisions: 8, 14, or 28.

Features & Benefits

Competitive 4-week lead time

Ships from the factory to the job site in 20 business days or less.

Secure mounting

Custom in-ground concealed sleeve base is embedded below floor and secured with 1/2" diameter masonry anchors. Bollard is fastened to the base with stainless hardware above finished ground. Body can be detached from base without disturbing flooring for maintenance or replacement.

Welded flat top

Bollard cap is welded on and ground smooth for a watertight, seamless finish.

Preps for two devices

Includes cutouts for mounting intercoms, card readers, or actuators. Preps are customizable to fit make/model specified for each device.

Corrosion resistant body

Durable stainless steel construction for long-lasting use in both indoor and outdoor locations.

Pre-installed Electrical Box (Optional)

Includes a die cast aluminum, weatherproof outlet box pre-mounted inside the bollard, ready for wiring and conduit. Available in single or double gang.

