
Bollard SQ33

B-12SQ-PT-32D-SM-SQ33 Satin Stainless Steel (630)



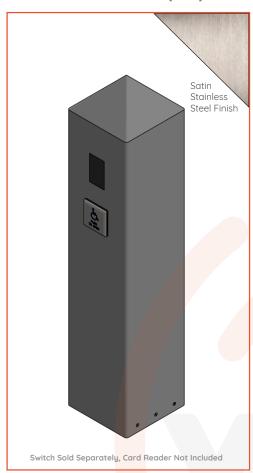

Specification Summary

Bollard overview:

- 1. Manufacturer: Wikk® Industries Inc.
- 2. Model: **B-12SQ-PT-32D-SM-SQ33**
- 3. Height: 58" (1473 mm)
- 4. Shape: 12" square (305 mm x 305 mm)
- 5. Material: Satin Stainless Steel 304, .179" wall (4.5 mm)
- 6. Finish: Satin (US32D) #4 (630)
- 7. Top: Welded Pyramid
- 8. Mount: Concealed Surface Mount
- 9. Prep for Card Reader Behind Black LEXAN™
- 10. Prep for Actuator
- 11. Country of Origin: Made in the U.S.A.

Optional add-ons:

 Hinged access panel with keyed cam lock (on back)

Optional Finishes:

- Long grain #6
- Mirror US32 (629)
- Non-directional

Countless custom options available!

Contact Wikk for custom short specs or budgetary and design assistance.

To ensure competitive bidding by qualified Sub Contractors, please specify Wikk's products in CSI Divisions: 8, 14, or 28.

Features & Benefits

Competitive 4-week lead time

Ships from the factory to the job site in 20 business days or less.

Simple installation

Easy install of base mounting bracket and bollard body with stainless hardware and standard tools. Body can be detached from base without disturbing flooring for maintenance or replacement. 1/2" diameter masonry anchors provided for mounting on pavers, concrete, or other flooring materials.

Welded pyramid top

Bollard top is welded on and ground smooth for a watertight, seamless finish. Pyramid angles prevent rainwater pooling or litter accumulation.

Card reader mounted behind flush LEXAN™

Black polycarbonate window with interior removable bracket for card reader. Sleek and weather-resistant flush finish. Includes access panel on back for maintenance. Card reader device not included.

Prep for actuator

Includes cutout for mounting an actuator or other device. Prep is customizable to fit make/model specified for device.

Corrosion resistant body

Durable stainless steel construction for long-lasting use in both indoor and outdoor locations.

