


# Bollard TR2

## B-6TR-FT-32D-BP-TR2

### Satin Stainless Steel (630)

Phone: 877.421.9490  
 Fax: 877.421.3158  
 customerservice@wikk.com

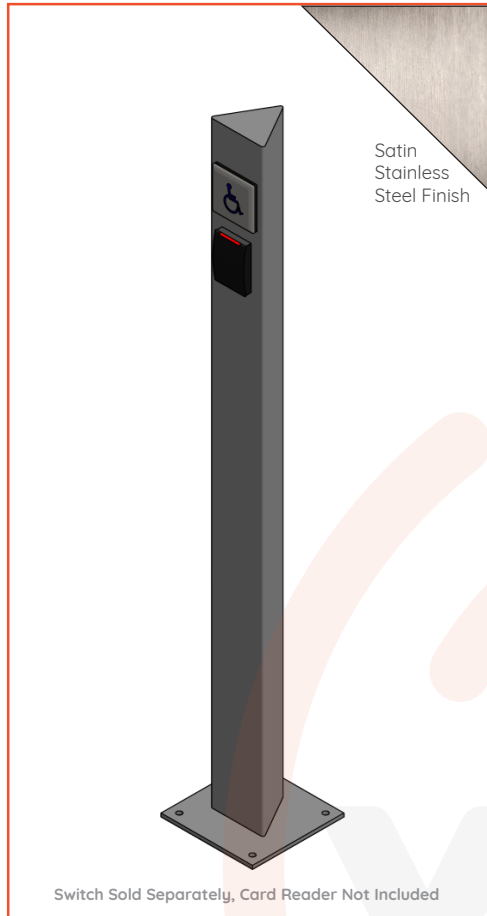

### Specification Summary

#### Bollard overview:

1. Manufacturer: **Wikk® Industries Inc.**
2. Model: **B-6TR-FT-32D-BP-TR2**
3. Height: 66" (1676 mm)
4. Shape: 6" X 6" X 6"  
(152 mm x 152 mm x 152mm)
5. Material: Satin Stainless Steel 304,  
.179" wall (4.5 mm)
6. Finish: Satin (US32D) #4 (630)
7. Top: Welded Flat
8. Mount: Fastened Base Plate
9. Prep for Actuator
10. Prep for Card Reader
11. Country of Origin: Made in the U.S.A.

#### Optional finishes:

- Long grain #6
- Mirror US32 (629)
- Non-directional

#### Countless custom options available!

Contact Wikk for custom short specs or budgetary and design assistance.

**To ensure competitive bidding by qualified Sub Contractors, please specify Wikk's products in CSI Divisions: 8, 14, or 28.**

### Features & Benefits

#### Competitive 4-week lead time

Ships from the factory to the job site in 20 business days or less.

#### Simple installation

3/8" thick base plate secured to inside welded gusset plate of bollard with 3 flathead screws for a clean seam and strong fastening. Base plate includes 3 mounting holes for easy install of bollard with standard tools. Bollard can be embedded up to 12" below flooring.

#### Secure mounting

1/2" diameter masonry anchors provided for mounting in concrete or other flooring materials.

#### Welded flat top

Bollard cap is welded on and ground smooth for a watertight, seamless finish.

#### Preps for two devices

Includes cutouts for mounting intercoms, card readers, or actuators. Preps are customizable to fit make/model specified for each device.

#### Corrosion resistant body

Durable stainless steel construction for long-lasting use in both indoor and outdoor locations.

